
## **Accessories**

## protection housing, tread plate and radiator guard



## **Protection Housing**

The housing is a flexible, economic and easy mounting device for many assembly situations. The mechanical stress, especially at mobile applications can be reduced by the used shock absorbers between housing and cooler. The radiator side is protected by a robust grid.

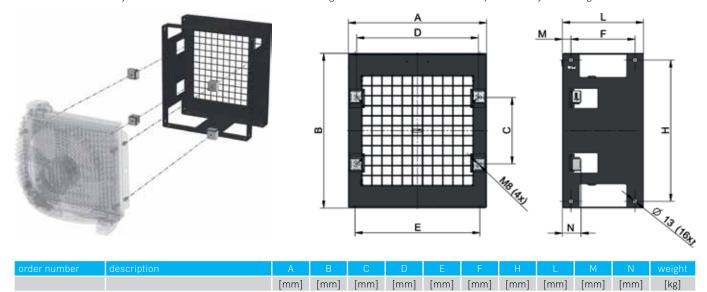

order number	description	fits an coaler type										
ILLEGAKTT16GT	protection housing kit TT 16 rail	490	590	306	436	450	210	550	260	25	55	13,4
ILLEGAKTT11GT	protection housing kit TT 11 rail	410	465	200	360	370	190	425	240	25	55	9,0
ILLEGAKTT07GT	protection housing kit TT 07 rail	334	425	172	290	300	190	385	240	20	33	5,2

order number	description	fits on cooler type										
		TT 05	TT 07	TT 11	TT 13	TT 16	TT 21	TT 25				
ILLEGAKTT07GT	protection housing kit TT 07 rail	-	•	-	-	-	-	-				
ILLEGAKTT11GT	protection housing kit TT 11 rail	-	-	•	-	-	-	-				
ILLEGAKTT16GT	protection housing kit TT 16 rail	-	-	-	-	•	_	-				

<sup>– ...</sup> not available

## Tread Plate / Radiator Guard

The tread plates are accessories for the asa series cooler types with side frames. The solid plates are used for applications where maintenances and servicing procedures require the cooler as a safe surface to step on. The radiator guard is a solid protection to avoid damages on the radiator air fins and oil channels.



description	description	fits on cooler type*								
		ASA 0177	ASA 0257	ASA 0367	ASA 0467	ASA 0567	ASA 0927			
tread plate kit	plate, flat screws;	•	•	MW2089	Ō	O	0			
radiator guard	grid, screws, washers;	ILLEGIT017SK	ILLEGIT025SK	ILLEGIT036SK	0	0	0			

<sup>• ...</sup> optional available

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually, as assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to ass attesting procedures or calculated, based on such tests. Due to different conditions in testing and application environments the performance may also vary by +/- 15%. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Therefore we recommend all products to be checked under the system operating conditions. This is also true for vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN 150 2768-v., General tolerances for casted parts according to DIN 150 2768-v., General tolerances for casted parts according to DIN 150 2768-v., General tolerances of weighting to 150 302-2 (DCTA). Tolerances for rubber parts are according to 150 302-2 (DCTA). Tolerances of weighting to 150 302-2 (DCTA). Tolerances of weighting to 150 302-2 (DCTA). Tolerances of weighting to 150 302-2 (DCTA).

© asa hydraulik for November 2018

tread plate

radiator guard

<sup>• ...</sup> optional available

o ... available on request

<sup>\*...</sup> DC drive versions are not compatible with these accessories